

TECHNICAL SPECIFICATIONS

Model	24082
Visual magnification, x	3
Objective lens, mm	42
Resolution, lines/mm	36
Angular field of view, grade	15
Viewing range*, m/yds	200 / 218
Eyepiece adjustment, dptr.	±5
Operating voltage, V	3 (2xAAA)
Built-in IR illuminator, m	100
Tripod mount, inch	1/4
Operating time (IR off/on), h	72/20
Operating temperature range	-25 °C ~ +40 °C / -13 °F ~ +104 °F
Length, mm/inch	202/7.9
Width, mm/inch	87/3.4
Height, mm/inch	60/2.3
Weight, kg/oz	0.4/14.1

* Maximum distance at which a human figure can be recognized under ideal viewing conditions; defined as clear conditions (no fog, dust etc.) under the light of a 1/4 moon (0.05 lux).

PACKAGE CONTENTS

- Patrol 2x24 unit
- Booster lens with protective caps
- Carrying case
- User manual
- Warranty card

For improvement purposes, design of this product is subject to change.



OVERVIEW

The Patrol-D 3x42 Night vision device is a set consisting of the Patrol 2x24 night vision device and a booster lens with a 42mm aperture increasing the magnification of the device up to 3 times.

The new Patrol-D 3x42 (gen.1) night vision scope has an original design well complemented with improved optical parameters. Compact and durable rubber armored housing, long life of two AAA batteries that ensure up to 72 hours of independent operation, handy rubber eyecup with a Diopter adjustment lever are some of the most prominent features of the new Patrol-D 3x42. This monocular is designed primarily for prolonged use in motion and a wide angle of the field of view makes observation of dynamic objects really exciting.

Your Patrol-D 3x42 scope is ideal for a variety of professional and recreational uses including the following:


- Wild life observation
- Astronomy
- Boating
- Search and rescue
- And many other activities...

WARNINGS AND PRECAUTIONS

Your Patrol Patrol-D 3x42 night vision scope was designed to provide many years of reliable service. To ensure that you get the most enjoyment out of your Patrol-D 3x42 always obey the following Warnings and Precautions:

- Do not point the unit towards any light source greater than 1 lux (such as car headlights) for an extended period of time. Exposure to bright lights can damage the unit. Any such damage may void your warranty.
- Your Patrol-D 3x42 was designed to be self-contained. Do not open the body of the scope or otherwise attempt to service this device.
- Always store the Patrol-D 3x42 in a dry, well-ventilated room. Keep the Patrol-D 3x42 away from any heating and air conditioning vents or other heating devices, direct sunlight.
- Avoid dropping or otherwise shocking the unit. Although designed for rugged outdoor use, the Patrol-D 3x42 incorporates a sophisticated optical system which could be damaged in extreme cases of misuse.
- Clean optical parts (lenses) with professional lens cleaning supplies designed for use with multicoated optics.

Damage to this device from failure to observe these warnings may void the Patrol-D 3x42's warranty!

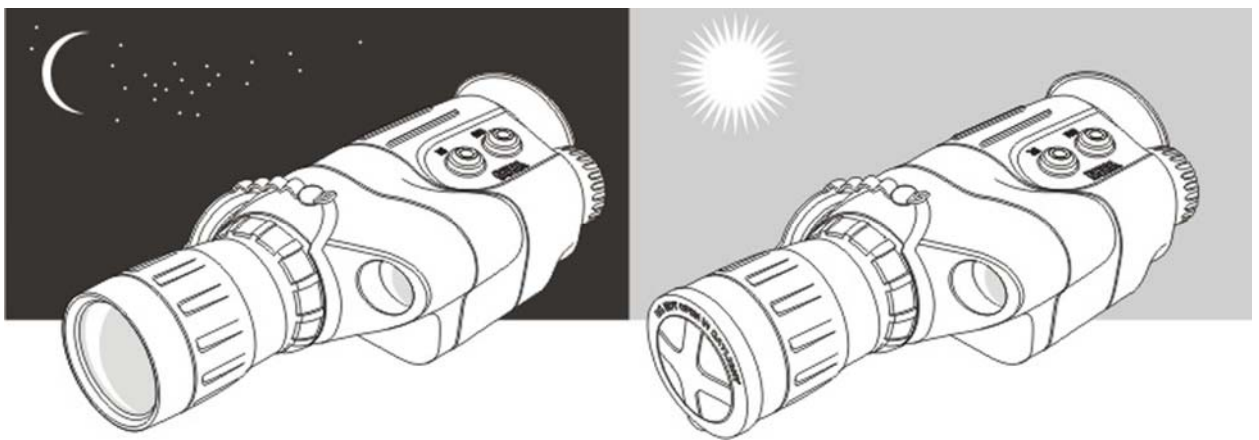

BATTERY INSTALLATION

Your Patrol-D 3x42 runs on two AAA batteries. To install, unscrew the battery compartment cover, insert the batteries into the battery compartment so that the positive (+) and negative (-) terminals of the batteries match the markings inside the compartment, replace the battery cover carefully. Do not overtighten.

USE AND TESTING


Make sure that the two AAA batteries have been installed according to instructions found in the battery installation section of this manual.

- Move into a dark area before activating the Patrol-D 3x42 unit.
- Remove the lens cap (1) by sliding it on the housing of the device.
- Remove the protective cap from the booster lens. Insert the booster lens into the objective lens of the device up to the stop and, preventing the objective lens from overtwist, rotate it clockwise so that the three protuberances at the bottom of the booster lens engage the grooves inside the objective lens.
- Activate the device by pushing the "ON" button (3).
- If you wish to test your night vision device in a lighted area, be sure the protective cap of the booster lens is in place prior to pressing the "ON" button. The lens cap has a pinhole opening to admit a small amount of light for testing purposes.
- If the subject to be viewed is in a completely dark area, including lowlight shadow areas, activate the infrared illuminator by pressing the "IR" Button (2) located next to "ON" button.

- Direct your device at an object at a distance of 10-100 m. (32 - 110 yds). Focus on the rough surface of the tube's screen by moving the lever of the eyepiece (4), then achieve the best quality of the object you are viewing by rotating the objective lens (5). If necessary, re-focus the eyepiece. After this adjustment, do not rotate the lever of the eyepiece irrespective of the distance and other conditions.
- Direct your Patrol-D 3x42 device at the subject to be viewed and adjust the final focus by rotating the objective lens (5) focusing ring until the image quality is optimal.
- The unit has a LED indicator performing two functions. The green light indicates that the unit is on. When you turn on the IR illuminator, the LED indicator changes its color from green to red. To turn off the device and the IR, push the “ON” button – the LED indicator will go out. Affix the lens cap back to the booster lens. To remove the booster lens, turn it counterclockwise and pull.

Caution! Do not enter the lighted area with the protective lens removed. After the Patrol unit is off, wait at least 10 minutes before removing the booster lens.

Note: You can use the Patrol-D 3x42 unit without the booster lens. In this case you are using the Patrol 2x24.

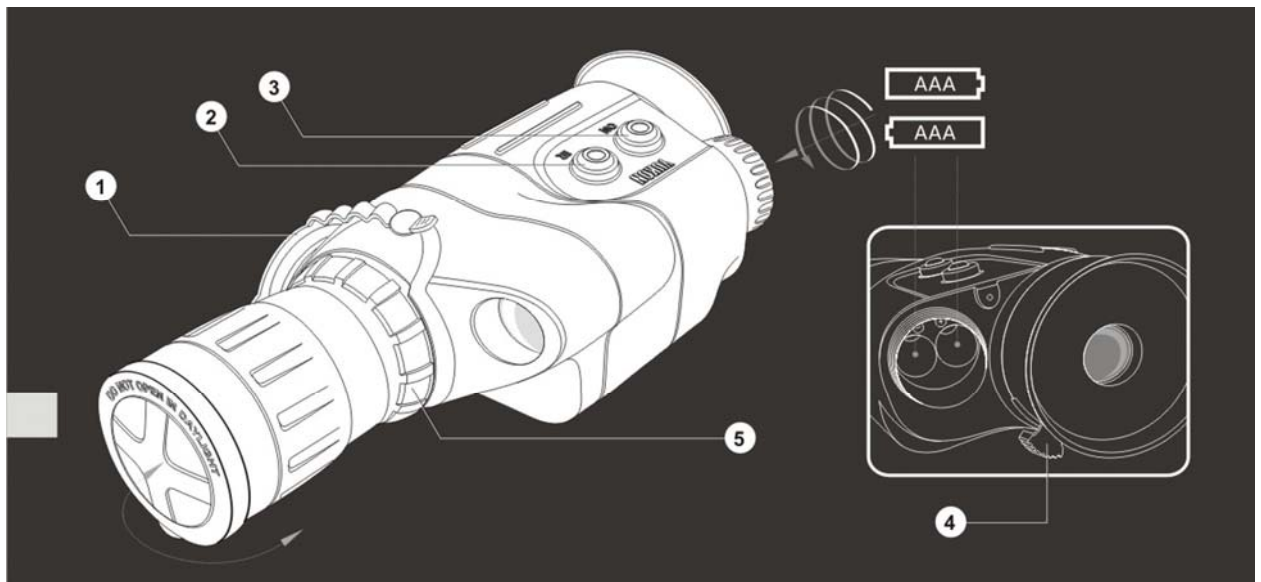

CAUTION!

Your Patrol-D 3x42 can be used in extreme cold. However, when the unit is brought back into a warm environment, you must wait approximately 2-3 hours before using the unit again. Failure to do so may result in damage as a result of condensation accumulating on the internal circuitry of the unit.

MAINTENANCE

Clean the lens with professional lens cleaning supplies intended for use with multicoated optics. Blow any dust or dirt off the lenses using dry, compressed air. Clean the Patrol-D 3x42 housing with a soft, clean cloth coated in petroleum jelly or similar synthetic material.

STORAGE

Always store the Patrol-D 3x42 (in its case) in a dry, well-ventilated area away from heating/air conditioning vents (or other heating devices). Remove the battery if the device is to be stored for longer than 2 months.

TROUBLESHOOTING

The scope will not turn on...

Check that the batteries are installed properly. Install the batteries according to the (+) and (-) polarity, ensuring that the markings on the battery and battery compartment correspond with one another. Check the battery contacts to ensure they are clean and free of corrosion; if necessary, clean the contacts. Make sure that the external contact lugs are not broken. If necessary, replace the batteries as they may be depleted. Also, be sure that the power is in the "ON" position when trying to turn on the scope.

Distinct black dots appear on the screen...

These dots are minor cosmetic blemishes resulting from tube production processes and do not interfere with the reliability or performance of the scope.

The scope flickers, flashes or "snows"...

The scope may flicker or flash when used in a bright environment; to correct this, place the cap over the objective lens and enter a dark environment. The scope will restore itself to a natural functioning state in several minutes or hours, depending on how long the scope had been exposed to the light. The scope may flicker for the first several seconds of use, even when in a dark environment, before the scope corrects itself and functions properly. The scope may "snow" for several minutes after being exposed to a bright light source (daylight, a car's headlights, fire, etc.) even if being operated in complete darkness (in this case you should turn the IR illuminator on).

The image is not focused...

Adjust the focus of the eyepiece and the objective (see Use and Testing). Check that the lenses are not foggy or dusty; if they are, carefully clean the external surfaces of lenses with a soft cotton fabric. Replace the batteries if the total battery charge is less than 2.2 V. When the unit is brought into a warm environment from a cold one, condensation may appear on the internal lenses; you must wait two hours before using the unit.

Visibility decreases or disappears...

Bright light sources, such as headlights, may cause visibility to decrease or disappear and the image to flicker. Turn the power off and turn the scope away from the light source; visibility will restore itself in several minutes.